

Soft and lofty nonwovens?

We have you covered.

When it comes to developing innovative hygiene solutions, we understand that more heads are always better than one. And that collaboration is all about being open to discovering better answers together.

But, it always helps to come prepared...


Bringing the soft... and the loft

One of the tools we bring to the table is **ASPUN™ Fiber Resins**. These ultra-soft, polyethylene- (PE-)based materials can be used in combination with other polymers, including polypropylene (PP) or polyester (PET) to produce bicomponent curly filaments that result in extremely soft, lofty nonwovens. Don't believe us? See for yourself (below).

In addition to excellent softness and drape, ASPUN™ Resins offer nonwoven topsheet, backsheet and acquisition distribution layers a wide range of advantages, including:

- The ability to process efficiently across a wide temperature range (200-300°C), allowing their use with many different polymers, including PP and PET
- Low melting temperatures, in comparison to PP, for quick and efficient bonding

We'd love to learn more about your nonwoven challenges. Please visit dow.com or contact your Dow representative to get the conversation started.

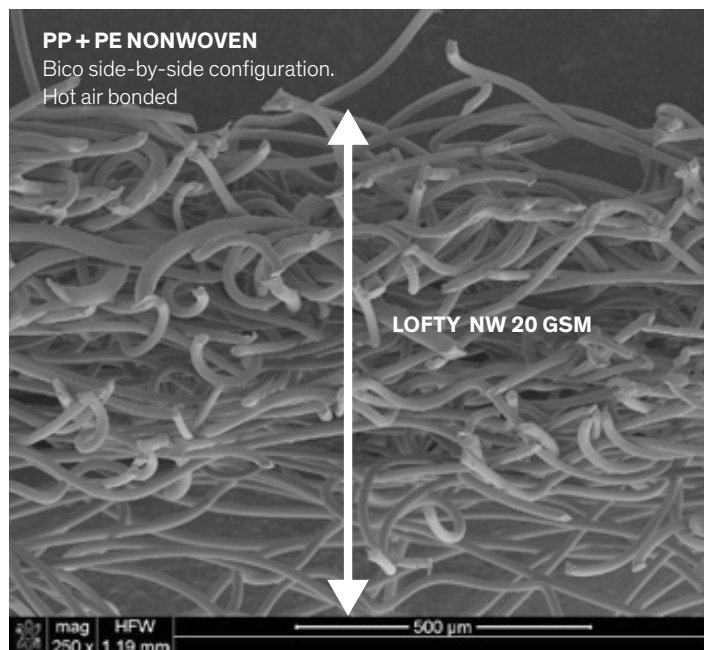

For more information about Dow, visit www.dow.com/about. To contact a Dow representative, visit, www.dow.com/contact.

NOTICE: No freedom from infringement of any patent owned by Dow or others is to be inferred. Because use conditions and applicable laws may differ from one location to another and may change with time, Customer is responsible for determining whether products and the information in this document are appropriate for Customer's use and for ensuring that Customer's workplace and disposal practices are in compliance with applicable laws and other government enactments. The product shown in this literature may not be available for sale and/or available in all geographies where Dow is represented. The claims made may not have been approved for use in all countries. Dow assumes no obligation or liability for the information in this document. References to "Dow" or the "Company" mean the Dow legal entity selling the products to Customer unless otherwise expressly noted. NO WARRANTIES ARE GIVEN; ALL IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ARE EXPRESSLY EXCLUDED.

THIS INFORMATION IS OFFERED IN GOOD FAITH FOR YOUR CONSIDERATION, BUT WITHOUT GUARANTEE OR WARRANTY (EXPRESS OR IMPLIED), AS ANALYTICAL CONDITIONS AND METHODS OF USE OF THE INFORMATION AND MATERIALS DESCRIBED HEREIN MAY VARY AND ARE OUT OF DOW'S CONTROL. ALTHOUGH THIS INFORMATION IS BASED ON DATA DOW BELIEVES TO BE RELIABLE AND ACCURATE, WE DO NOT INTEND FOR YOU TO USE, AND YOU THEREFORE SHOULD NOT CONSTRUCE, THE CONTENTS OF THIS DOCUMENT AS BUSINESS, TECHNICAL OR ANY OTHER FORM OF ADVICE. WE RECOMMEND YOU DETERMINE THE SUITABILITY OF THE INFORMATION AND MATERIALS DESCRIBED HEREIN BEFORE ADOPTING OR USING THEM ON A COMMERCIAL SCALE. DOW ASSUMES NO LIABILITY IN CONNECTION WITH THE USE OF THIS INFORMATION.

This document is intended for use in North America.
© 2022 The Dow Chemical Company